

MONIUPS SOFTWARE AND SERVICE

MONITOR YOUR UPS WITH AN EXPERT



A SERVICE
EXPERT AT
YOUR
FINGERTIPS


INNOVATIVE REMOTE MONITORING SYSTEM

MoniUPS – for critical applications

MoniUPS is the innovative remote monitoring system, able to control all brands and all kinds of UPS systems; acquire the data, elaborate them on a cloud application, and make it readily accessible 24 hours a day, everywhere in the world, through a tablet or a pc. MoniUPS doesn't need a control over local network environment, granting real-time interaction and communication, without being based on the premise of external network access to the UPS.

The periodic report (available online and in real time), the telemetry, and a wide series of warnings and alarms about the UPS system will make your critical applications more flexible, reliable and secure. Being able to remotely control a UPS, means having a specialist take care of your UPS 24 hours a day.

Thanks to constant monitoring, it is possible to maximise UPS availability (operation) with targeted actions such as vital parameters inspection, data analysis, comparison with historical data as well as predictive diagnosis. It is also possible to minimize downtime costs due to power failures, thanks to immediate identification of any malfunction with measures to solve the problem right from initial servicing.

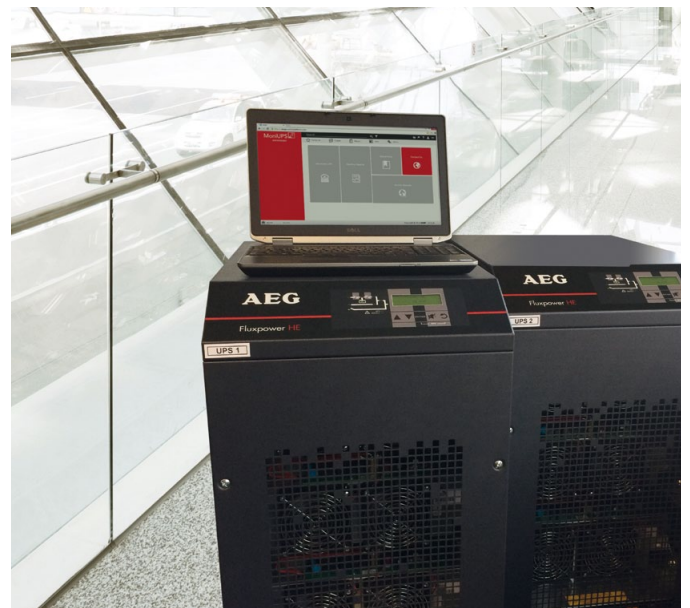

Compared to the diagnostics carried out in the field, remote diagnosis prevents any damage and reacts immediately in the best way, right from the start.

Expert service 24 hours a day



For all customers who acquired a UPS to protect their critical loads, this innovative tool will constantly monitor and supervise the whole installation, providing a predictive diagnosis. Due to the remote monitoring system, the UPS can communicate a warning message to our AEG Power Solutions experts, who will in turn make a remote diagnosis on the UPS, reach the site

installation, and restore the UPS, before a failure can occur.

This immediate reaction, and the resolution of potential faults at the first intervention are vital for critical applications, where power interruption occurs due to a UPS fault (coming from any possible problem), may cause extensive damage.

For this purpose, it is fundamental that any UPS status is immediately sent to the remote application, and can automatically define the priority of intervention. Recent statistics about remote monitoring systems indicated that nearly 40 % of all potential faults were solved over the phone, with an immediate intervention.

ELABORATED ON A STATE OF THE ART CLOUD ENVIRONMENT

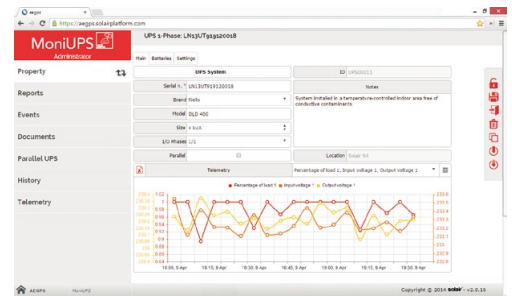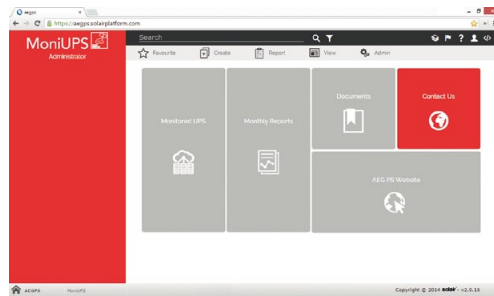

MoniUPS – System Benefits

- Maximization of electrical system availability through constant monitoring, especially in critical environments
- Optimization of resources
- Lower operating costs
- Proactive analysis of data and trends compared with the entire install-base, in order to suggest corrective actions, thus ensuring best performances
- Supplying AEG PS service engineers with relevant data to help with minor and major problem-solving, thereby reducing service response times
- Preventing downtime with predictive analysis thus extending equipment life
- Supply customers with comprehensive reports with details on operational performance as well as the status of the UPS

MoniUPS – at a glance

Any UPS model (AEG Power Solutions or other brand), equipped with an SNMP-Ethernet card, can easily communicate with the MoniUPS cloud application through a gateway deployed on the local network.

MoniUPS gateway supports a wide variety of UPS and SNMP brands and only needs to be installed in the same local network where the UPS is installed. A single gateway can support up to 8 UPS and more than one gateway can be installed within the same network. To properly communicate with the cloud application the gateway needs to only send data over the internet without involving dedicated networking configurations such as port-forwarding or NAT rules; in this way the installation is very simple and doesn't involve complex and expensive field activities.

Data is collected from the SNMP by a polling cycle sampled at a frequency that

depends on the number of UPS monitored (usually one second), consolidated on the gateway and sent over to the cloud application every 15 seconds.

In case of an internet connection failure, the gateway on-board memory can store up to 4 hours of data (from 8 UPS simultaneously). This data will be handed over to the cloud once the connection is restored. Events and alarms received asynchronously from the SNMPs are relayed directly to the cloud with FIFO logic.

Critical events will trigger notifications with different levels of severity, to the AEG PS service expert, directly to the customer, or both.

All data, measures, alarms and events are stored on the cloud application, and is accessible to AEG PS service engineers.


Each customer is granted a dedicated login: you can monitor the UPS installed, providing full access to all information about the operating status of your systems.

Every month a technical report is automatically generated, available on the cloud application and delivered via email to customers. If during the previous month an event with high severity has occurred, the report may also include a technical comment from AEG Power Solutions service experts.



AVAILABILITY
THROUGH
MULTIPLE
CHANNELS

HIGHEST LEVEL OF SECURITY ALLOWED

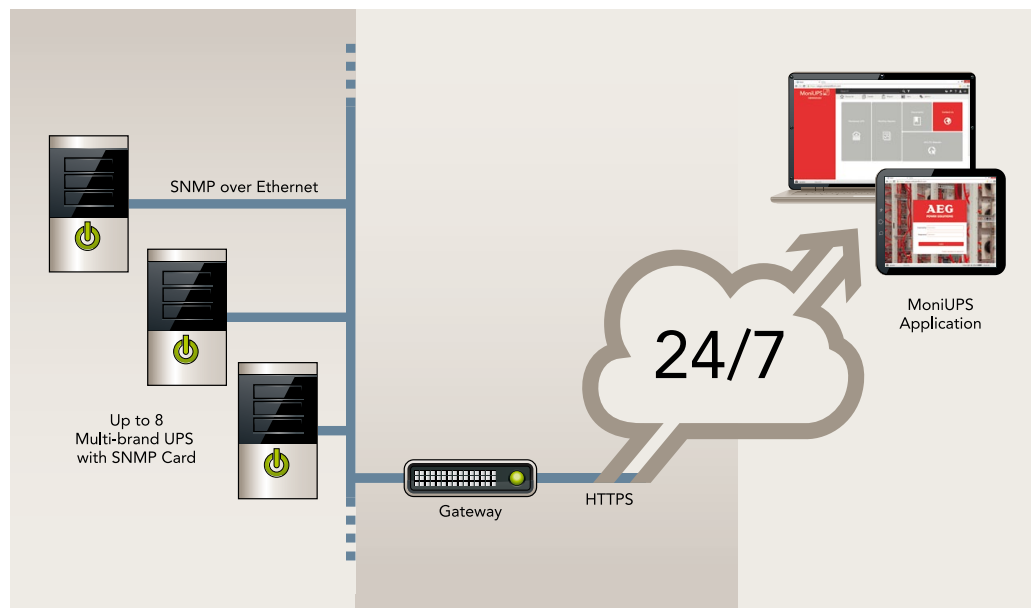

Security and availability

MoniUPS Gateway manages the highest level of security allowed by the SNMP version; implements and communicates with the cloud environment through enterprise-grade standard HTTP over SSL/TLS layering (HTTPS), using X.509 certificates issued by recognized authorities and a public-key infrastructure; thus, helping to protect against man-in-the-middle attacks.

Additionally, it provides communication encryption of data exchanged between client and server, thereby ensuring against eavesdropping and tampering with and/or forging the contents of the communication.

Gateway identification has a lightweight and efficient cryptographic system.

All data exchange sessions are subject to authentication based on the exchange of a hashed string. As hash functions are expected to be non-invertible, it is then not possible to reconstruct the input data from its hash value alone without spending great amounts of computing time.

Communication between the Gateway and cloud is always unidirectional (Gateway to cloud); in this way it is not possible by design, to access the Gateway on the local network from any remote location.

The remote monitoring application runs on a state-of-the-art cloud environment on the Microsoft Azure infrastructure, where every service and VMs run under a private network exposing only web endpoints.


High availability is provided by multiple geography deployment, cluster-managed web and external services, mirrored db instances and a dedicated monitoring system. The application front-end can be accessed via web browser through user authentication and an HTTPS connection.

OPTIMUM BATTERY LIFE MAINTAINED

OUR GLOBAL EXPERT SERVICE

Best battery working temperature for better performance

The battery life will also vary depending on its operating temperature. It is very important for the battery to work at a temperature not far from 20 – 25 °C, since an increase of the operating temperature compared with the nominal values will reduce its expected operating life.



Battery replacement

The battery is a vital part of the UPS system, which needs to be checked and controlled periodically. A fundamental parameter to be controlled during routine maintenance is the operating temperature, both for the batteries as well as for the battery room.

A low temperature will have a negative impact upon batteries, decreasing the available capacity and also the discharge voltage (the viscosity increases, reducing the speed of the acid diffusion in the pores of the active material).

Moreover, an increase of the battery operating temperature, will increase its capacity, due to variations in the viscosity and the resistance of the electrolyte (as shown in the 1st graph below).

The nominal capacity of batteries are very sensitive with the operating temperature: at its normal operating temperature, batteries will have nominal capacity properties.

After a long operating life with stable capacity values, the battery will decrease its properties and will be no longer reliable once it decreases at a value lower than 80 % of its nominal value (end of life).

For all the parameters shown above, our AEG PS experts recommend maintaining periodic controls on the battery room, reporting the exact temperature and suggesting any possible modification to the operating conditions.



Apart from the operating conditions, other values are periodically monitored, such as:

- Battery voltage
- Recharging current
- Battery string voltage measurement
- Battery testing:
 - Discharge test
 - Battery current measurement (during the discharging period)
 - Battery voltage verification before the test and at the end of the charge
 - Minimum battery voltage
 - Maximum discharging current


Capacitors and fan replacement

The most critical power components, according to their expected life are the capacitors, forming the DC filter downstream the rectifier, and the internally mounted cooling fans, which allow for correct air exchange to the internal electronic devices.

Their expected life is strictly dependent on the hot air extracted. Regarding the capacitors, their expected life is strictly dependent upon the operating temperature (which then depends on the percentage of load applied to the UPS). Moreover, a good filtering action (DC ripple lower than 1 %) will allow for lower battery temperatures, directly connected to the DC bus of the UPS, both in the recharging and in the discharging phase.

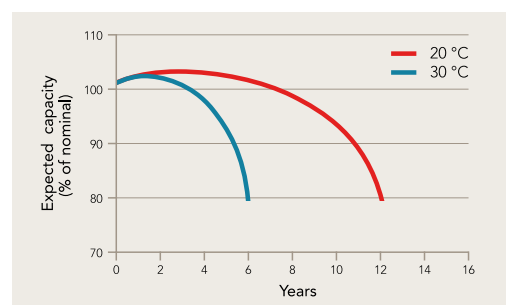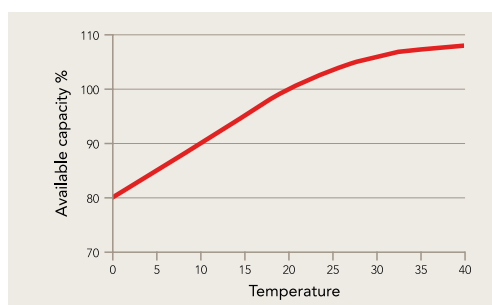

AEG POWER SOLUTIONS MAINTENANCE CONTRACTS



Our customers can rely on a global network of 20 Service Centers, supported by over 150 field engineers and more than 100 certified service partners around the world, with both scheduled maintenance and 24/7 service to keep your business running and exceed HSE requirements.

From system selection to process installation and commissioning, our certified experts will go beyond your expectations by offering

service excellence that will ensure the lowest operational cost for your mission-critical equipment.

The reliability of your installed power solution is supported by a Global Service Team renowned for its short response time and troubleshooting efficiency. Choosing MoniUPS with one of our service contracts gives you the ultimate peace of mind and provides reassurance, complete control of costs, security and uninter-

rupted power supply when situations are the most critical.

You will additionally benefit from a full range of professional services that will protect and ensure the durability of your investment and will take over when you need it the most such as consulting, full range site servicing, installation and commissioning.

CONTRACT COMPONENTS	Advanced	Classic	Standard	Basic	Monitoring
1 Preventive Maintenance per year for UPS <60 kVA	■	■	■	■	
2 Preventive Maintenances per year for UPS ≥60 kVA	■	■	■	■	
ECO = Emergency call out support	■	■	■	■	■
Priorities of intervention	■	■	■	■	■
Labor hours	■	■	■	Forfait	
Technical updates for AEG PS UPS (excluded in Multibrand Services)	■	■	■		
Spare Parts (batteries and capacitors filter excluded)	■	■	■	20 % discount	
Remote Monitoring MoniUPS Connection	■	■			■
Connection KIT MoniUps	■	■			■
Monthly Report MoniUps	■	■			■
Technical support telephone line availability 24h	■	■			■
Technical intervention 24 h	■	Optional	Optional		Optional
Technical intervention in 16 h from Monday to Friday				■	
Technical intervention in 8 h from Monday to Friday		■	■		
Technical intervention in 4 h	■	Optional	Optional		

AEG PS - MoniUPS - EN - 04/2015 V1 - Technical data in this document does not contain any binding guarantees or warranties. Content only serves for information purposes and can be modified at any time. We will make binding commitments only upon receipt of concrete enquiries and customer notification of the relevant conditions. Due to the non-binding nature of these terms, we assume liability neither for the accuracy nor completeness of the data provided here. AEG is a registered trademark used under license from AB Electrolux.



AEG Power Solutions

Approach your local AEG Power Solutions representative for further support. Contact details can be found at:

www.aegps.com

